

OPERATING VOLTAGE

220/250Vac 50Hz or 100/120Vac 50Hz

INPUT

EDDY CURRENT PROBE 8mV/um (200mV/Thou) or
OPTIONAL: MAGNETIC INDUCTIVE PROBE

No. OF TEETH

1 PER REV or SPECIFY ON ORDER

TRANSDUCER SUPPLY

BUILD IN EDDY CURRENT PROBE DRIVER

OUTPUTS

1 x 4-20mA FOR 0 - 6000rpm

CAL LEVEL 75%

INDICATORS

A1 red LED
A2 red LED
OK green LED

ALARMS

A1 POSITIVE GOING ALARM NORMALLY OPEN,
CLOSED FOR ALARM NORMALLY ENERGISED,
NON-LATCHING SWITCHING CURRENT 1mA TO 1A @
125Vac

A2 POSITIVE GOING ALARM NORMALLY OPEN,
CLOSED FOR ALARM NORMALLY ENERGISED,
NON-LATCHING SWITCHING CURRENT 1mA TO 1A @
125Vac



A3 NORMALLY OPEN, CLOSED FOR ALARM
NORMALLY ENERGISED, NON-LATCHING
SWITCHING CURRENT 1mA TO 1A @ 125Vac

ENCLOSURE RATING

PAINTED STEEL WITH INGRESS OF IP.66

TEMPERATURE RATING

0 to +50°C

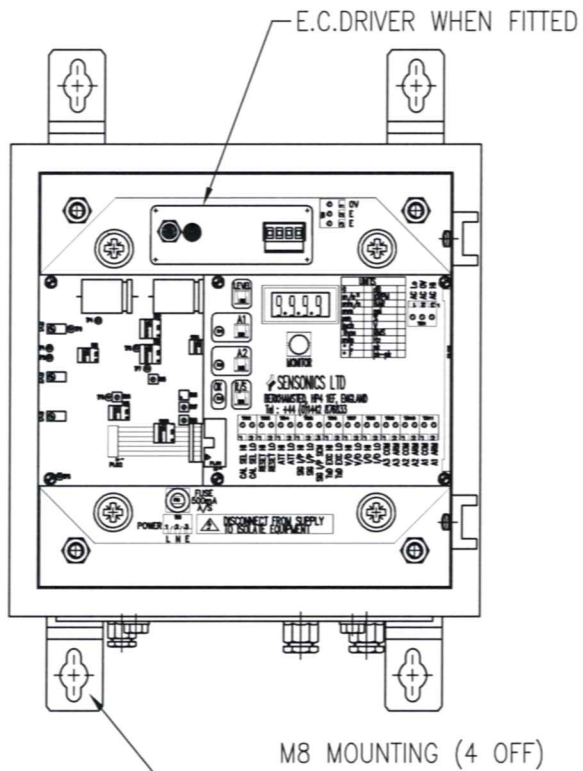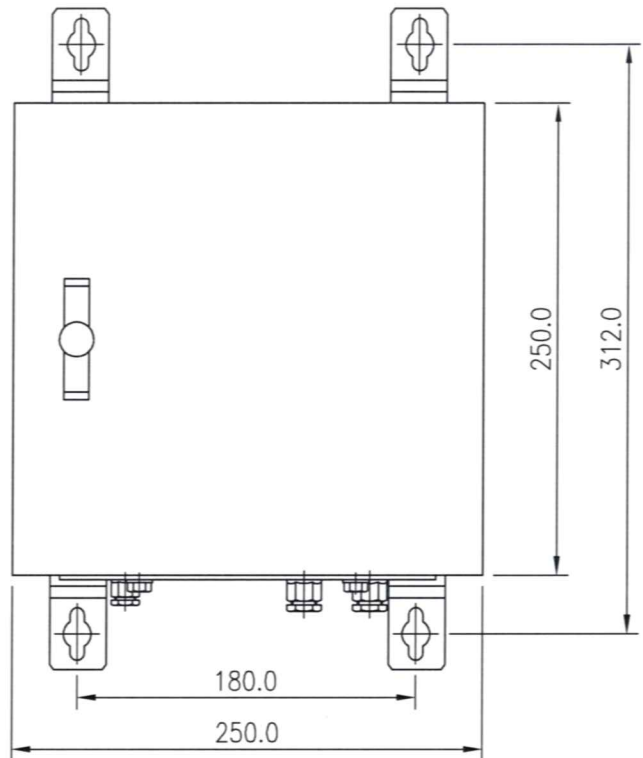

ISSUE	DATE	CN. No.	MOD BY	CHECKED
-------	------	---------	--------	---------

CHANGE NOTES

PROJ.ENG. D.SIPOS	SCALE 1:4
DRAWN M.K.WELLS	DIM'NS mm
CHECKED D.SIPOS	DATE 28.8.2002
CUST.REF.	SHEET No. SHT 11 OF 1

SENSONICS LTD NORTHBRIDGE ROAD, BERKHAMSTED, HERTS, HP4 1EF, ENGLAND
Tel : +44 (0)1442 876833 Fax : +44 (0)1442 876477

TITLE
**ME9608 SINGLE CHANNEL SPEED MONITOR
HOUSED IN IP66 STEEL ENCLOSURE 250 x 250 x 160D.
(STANDARD PRODUCT)**

THIS DOCUMENT IS SUBJECT TO THE CONDITIONS
IN THE ENCLOSED MEMO DS 742

DRAWING No. **IS.3035** ISSUE **1**